




STORM SURGE

EBFCC-28-18V-20V

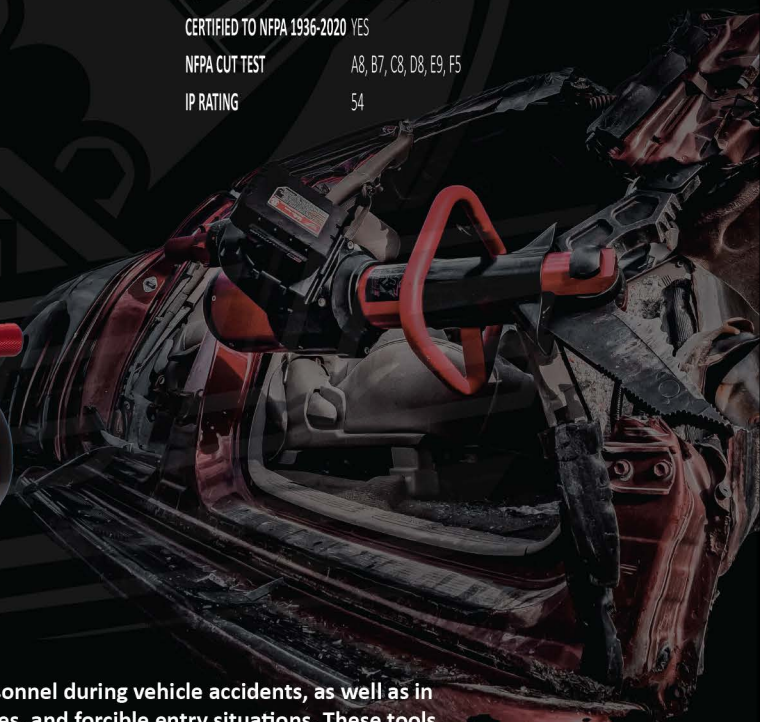

LENGTH	36.21 IN	919.79 MM
HEIGHT	11.74 IN	298.13 MM
WIDTH	10.50 IN	266.70 MM
WEIGHT		
EXCL. BATTERY	52.75 LBS	23.92 KG
BATTERY WEIGHT:		
MILWAUKEE M18-9AH:	2.4 LBS	1.08 KG
DEWALT 20/60V-9AH:	3.4 LBS	1.54 KG
MAKITA 18V LXT-6AH	1.5 LBS	0.68 KG
MAX. BLADE OPENING	10.12 IN	257.06 MM
MAX. CUT REACH	5.55 IN	140.96 MM
MAX. SPREAD DISTANCE	17.00 IN	431.80 MM
MAX. SPREAD FORCE	286,000 LBF	1,272 KN
POWER SOURCE OPTION	MILWAUKEE M18	
CERTIFIED TO NFPA 1936-2020	YES	
NFPA CUT TEST	A8, B7, C8, D8, E9, F5	
IP RATING	54	

TNT hydraulic rescue tools can be used by emergency rescue personnel during vehicle accidents, as well as in other rescue scenarios such as confined spaces, structural collapses, and forcible entry situations. These tools include cutters, spreaders, combination tools, and rams, and are available in gas, battery, and air-driven versions. More information about use and capabilities can be obtained from your local distributor.

